District 08 Mobility Performance Report

2020 QUARTER THREE

DEPARTMENT OF TRANSPORTATION

October 27, 2020 DIVISION OF OPERATIONS TMS SUPPORT

District 08 Mobility Performance Report

2020 QUARTER THREE

EXECUTIVE SUMMARY

Overview

Caltrans District 8 covers approximately 28,650 square miles of land, making it the largest district in California. District 8 consists of two counties; San Bernardino and Riverside. Both counties are in Southern California and part of the Inland Empire. Riverside County has an estimated population of 2.4 million residents while San Bernardino County is estimated at 2.2 million residents. With a total of 4.6 million residents, District 8 comprises of twelve percent of California's total population.

The quarterly Mobility Performance Report compares the data from the current quarter with over a year ago as well as the previous quarter, for the following performance measures:

- Vehicle Miles of Travel (VMT)
- Vehicle Hours of Delay (VHD)
- Lost Lane Miles (LLM)

- Delay by County and Route
- Detector Health
- Bottleneck Locations

Vehicle Detector Stations installed on urban-area freeways are continuously collect data and are strategically placed at locations where congestion is regularly experienced. The MPR uses the data collected from Caltrans Performance Measurement System (PeMS) to produce this report and conduct traffic studies. This report presents congestion information at two speed thresholds: delay from vehicles traveling below 35 miles per hour (mph), and delay from vehicles traveling below 60 mph. The 35-mph threshold represents severe congestion, while delay at 60 mph represents all congestion. These thresholds are set by Caltrans and are based upon engineering experience and District input.

FINDINGS

Vehicle Miles Traveled (VMT) in District 8 during the third quarter of 2020 was 4.9 billion miles, which was a 9.5 percent decrease when compared to VMT from a year ago and a 12.1 percent increase from the previous quarter.

In the third quarter of 2020, at the 35mph speed threshold, San Bernardino County exhibited 0.8 million vehicle hours of delay followed by Riverside County at 0.84 million. Total delay in District 8 equaled 1.6 million VHD for the 35mph speed threshold. This was a 56.6 percent increase from the previous quarter, and a 53.1 percent decrease when compared to the same quarter over a year ago. The 60-mph speed threshold saw a similar trend, during the third quarter of 2020, total delay equaled 5 million VHD, which was an increase in delay by 47.4 percent from last quarter and a 42.1 percent decrease in delay for the same quarter over a year ago.

The busiest day of the week as far as congestion for the third quarter was Friday with 96,000 hours of delay for speed under 60 mph followed by Thursday at 67,000 and Monday with 61,000 hours.

Top Ten Bottlenecks for the Third Quarter of 2020

Rank	County	Location Name	Shift	Fwy	Abs PM	CA PM	Latitude	Longitude	# Days Active	Avg Extent (Miles)	Total Delay (veh-hrs)	Total Duration (Hours)
1	Riverside	Winchester Road	РМ	I15-N	61.32	6.8	33.52	-117.16	65	5.89	181,088.40	237.75
2	San Bernardino	Fontana Rest	PM	I10-E	60.57	13.8	34.07	-117.48	63	3.53	61,424.90	170.58
3	San Bernardino	Jurupa	PM	I15-S	107.73	0.969	34.05	-117.55	63	1.72	48,589.80	198.17
4	San Bernardino	4th Street	PM	I15-N	109.97	3.2	34.08	-117.54	65	1.10	46,265.10	214.50
5	Riverside	El Cerrito	РМ	I15-S	92.19	37.702	33.83	-117.53	63	2.37	38,967.40	175.50
6	Riverside	Van Buren Blvd	РМ	I215-S	25.13	33.463	33.88	-117.27	64	2.76	34,978.50	157.08
7	Riverside	Main	PM	SR91-E	43.84	6.492	33.88	-117.56	65	1.13	33,716.40	246.50
8	San Bernardino	Haven Ave	PM	I10-E	54.99	8.22	34.07	-117.57	62	2.30	30,242.90	151.83
9	San Bernardino	Oakie Flats	РМ	I15-N	126.77	17.4	34.26	-117.45	48	3.45	29,872.30	81.83
10	San Bernardino	Archibald	РМ	I210-E	58.44	6.0	34.14	-117.59	61	3.24	29,021.70	106.92

PROJECT STATUS

Some of the following District 8 projects which are separated by county are currently in construction while some have been suspended due to COVID-19 pandemic, for the year of 2019 and 2020. These projects will relieve congestion in District 8 once complete however, during the construction phase there might be an increase in delay during off-peak periods due to lane closures.

Riverside County:

RIV – Rte. 215: Location – Rte. 215 Interchange at Scotts Road, EA: 0A0204

Postmile R14.80 to 16.20 – Interchange improvement at Scotts Road city of Menifee.

RIV – Rte. 15: Location - City of Lake Elsinore on I-15 From 1.6 mile south of to 0.4-mile North of Railroad Canyon Rd, EA: 0A4414

Postmile 17.60 to 19.60 - Freeway and Bridge widening, JPCP, HMA, Retaining Walls, Ramp Modifications, Local Street Improvements.

RIV – Rte. 15: Location – Murrieta From 0.3 miles south of to 0.6 miles north of California Oaks Ave. Undercrossing, EA: 0A4904

Postmile 10.30 to 10.90 – Bridge widening, Traffic and Drainage Improvements.

RIV – Rte. 15,91: Location - Corona on Rte. 91 from Main St. to Rte. 15, and on Rte. 15, Northbound 15 to WB Connectors EA: 0F5434

Rte 15 - PM 41.08 to 42.31 and Rte. 91 – PM 6.05 to 7.57 Express Lanes' Connectors - Bridge & GP Lane Widening

RIV – Rte 15: Location – SR74 to SR-60 and I-215 to SR-74, EA: 0J0804

I-15 Corridor Improvement Project to add two Toll Express lane each direction from Cajalco Road to State Route 60, widen bridges and add sound wall.

RIV - Rte 215: Location - Menifee Rte 215 at Newport Rd Interchange, EA: 0J4404

Postmile R17.40 to 19.30, Interchange Improvement.

RIV - Rte 15: Location - Interstate 15/Cajalco Road Interchange, EA: 0J6104

Postmile 36.40 to 37.60 - Interchange Improvements & Reconstruction

RIV- Rte 60: Location – City of Beaumont, Gilman Springs Road to 1.37 miles west of Jack Rabbit Trail EA: 0N69U4

Postmile 22.10 to 26.60 – Construct a Truck Climbing Lane and Truck Descending Lane

RIV - Rte 60: Location - City of Beaumont, Potrero Blvd

Postmile 28.80 to 30.20 – New Bridge and Highway widening.

RIV - Rte. 10: Location - City of Indio at Jefferson St, EA: 475204

Postmile 51.70 to 53.10 - Demolish existing bridge and northbound Indio Boulevard overcrossing and replace with new six-lane bridge.

RIV – Rte 60: Location – Rte 60 from Milliken Ave to 91/215

Postmile 0.0 to R12.2, Replace wireless communication system with Fiber Optic Infrastructure.

San Bernardino County:

SBD - Rte 10: Location - LA/SBD county line to 0.2 miles west of Cherry EA: 0C2514

Postmile 0.00 to 13.20, Widen Express Lanes (Phase 1)

SBD – Rte 210: Location – Highland Ave to San Bernardino Ave

Postmile 25.00 to 33.20, Widen Freeway add one lane in each direction.

SBD – Rte 15: Location - Limonite Ave/I-15, EA: 0E1504

Postmile 46.70 to 49.70, Limonite Avenue at I-15 interchange Improvement Project, in city of Eastvale and Jurupa Valley.

SBD – Rte 60: Location – Near Chino and Various Locations from 0.1 mile west of Pipeline Ave OC to 0.1 Mile East of Benson Ave. EA: 0F0304

Postmile 0.07 to 3.00, Bridge Replacement, Pipeline Ave, Monte Vista Ave, Benson Ave.

SBD - Rte 215: Locations - Rte 215/Barton Rd, EA: 0J0704

Postmile 0.58/1.95, Project to reconstruct the existing I-215/Barton Rd Interchange.

SBD - Rte 10: Location - San Bernardino County from Redlands to Orange St, EA: 0K2914

Postmile 30.90 to 33.30, Lane Replacement in San Bernardino County in Redlands from Orange Street Undercrossing to Redlands Blvd off-ramp undercrossing.

SBD - Rte 10: Location - Colton at Santa Ana River Bridge EA: 0Q9104

Postmile 23.80 to 23.80, Bridge Rehabilitation and Seismic Retrofit.

SBD - Rte 15: Location – Kenwood Ave to West Hesperia, EA: 0Q7404

Postmile 15.40 to 30.80, Lane Replacement on I-15 from 0.4 mile north of Kenwood Avenue to 0.3 mile south of West Hesperia OH

SBD - Rte 15: Location - Rte 15 to 395 Connector, EA: 1L5404

Postmile 31.50 to 32.50, repair Bridge Deck

SBD - Rte 15: Location - Victorville from Mojave Dr to Stoddard Wells Rd, EA: 3555VA

Postmile 42.50 to 46.00, 0.5 Mile North of Mojave Drive to 1.5 Mile North of Stoddard Wells Road Overcrossing, Widen I-15, Reconstruct 3 IC'S, construct 2 new BR and widen 3 BR

SBD - Rte Various Locations, San Bernardino and Riverside County, EA: 1C6304

Install Road Weather Information System and Modify Existing Electrical system


SBD – Rte 10: Location – 0.2 MI w/o Live Oak Canyon Rd to County Line, EA: 0K2934


Postmile: R36.80/39.20, Pavement Rehab & Continuously Reinforced Concrete Pavement

SBD - Rte 10: Location - Alabama street to 0.2 Miles East of County Line Road, EA 384234

Postmile: 29.40 to 39.20, Install Fiber Optic System and Modify Electrical System

Quarterly Mobility Statistics Measure Graph **Percentage Change** Miles (Billions) 2019 Q3 Over one year ago Over last quarter 2020 Q3 4.9 6 2020 Q2 Vehicle 4.4 4 Miles of -9.5% 12.1% Travel (VMT) 2 0 Hours (Millions) 4 2019 Q3 3.5 Over last quarter Over one year ago **Total Vehicle** 3 Hours of 2020 Q3 -53.1% 56.6% Delay (VHD) 2 1.6 2020 Q2 1.0 at 35 mph 1 0 Hours (Thousands) Average Non-Over last quarter Over one year ago 60 2019 Q3 Holiday 50 Weekday 40 Vehicle -52.9% 67% 2020 Q3 22 30 Hours of 2020 Q2 20 Delay (VHD) 13 10 at 35 mph 0 Hours (Millions) 2019 Q3 10 Over one year ago Over last quarter 8.6 8 **Total Vehicle** 2020 Q3 Hours of 6 -42.1% 47.4% 5.0 Delay (VHD) 2020 Q2 at 60 mph 2 0 Hours (Thousands) Average Non-Over last quarter Over one year ago 150 2019 Q3 Holiday 116 Weekday 100 2020 Q3 Vehicle -41.7% 48.9% 2020 Q2 Hours of 50 45 Delay (VHD) at 60 mph 0

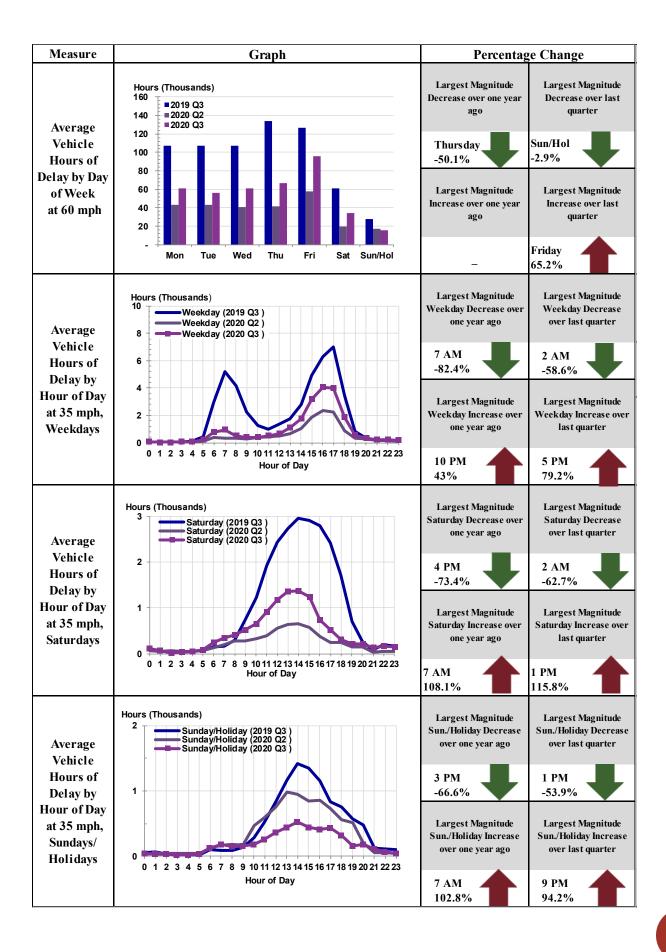

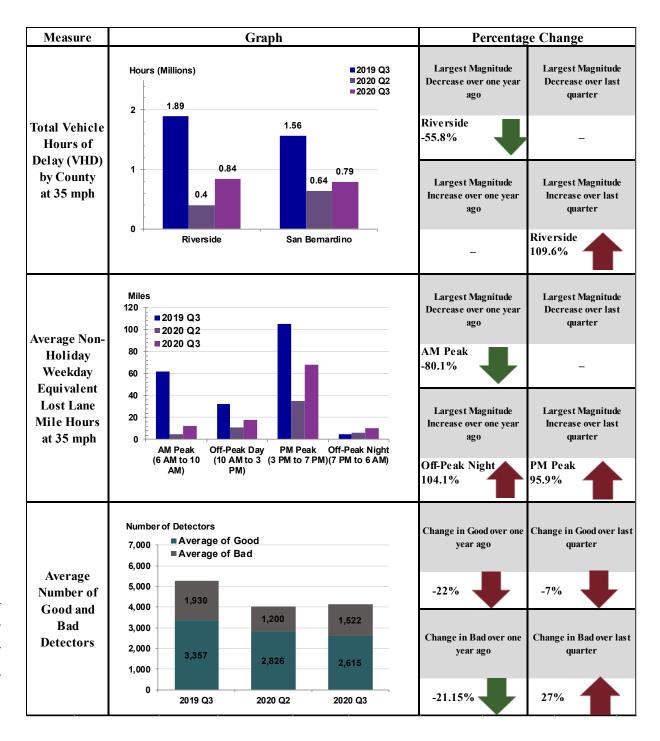

Congestion by Route													
		Vehicle Hours of Delay at 35 mph			Differe 2020 Q3-:		Differe 2020 Q3-	Rank					
Route	County	2019 Q3	2020 Q2	2020 Q3	Absolute	Percentage	Absolute	Percentage	2019 Q3	2020 Q2	2020 Q3		
I15	San Bernardino	353058.2	155,075.80	341,635.60	(11,422.60)	-3.24%	186,559.80	120.30%	5	2	1		
I15	Riverside	522249.6	149,252.40	307,073.30	(215,176.30)	-41.20%	157,820.90	105.74%	3	3	2		
I215	Riverside	501353.6	132,382.40	265,264.90	(236,088.70)	-47.09%	132,882.50	100.38%	4	5	3		
I10	San Bernardino	534007.1	267,209.10	215,540.00	(318,467.10)	-59.64%	(51,669.10)	-19.34%	2	1	4		
SR91	Riverside	693502	97,894.20	194,948.40	(498,553.60)	-71.89%	97,054.20	99.14%	1	6	5		
I210	San Bernardino	330407.9	137,508.60	120,885.00	(209,522.90)	-63.41%	(16,623.60)	-12.09%	6	4	6		
SR60	Riverside	97470.7	15,287.50	61,890.30	(35,580.40)	-36.50%	46,602.80	304.84%	8	10	7		
SR71	San Bernardino	81683.4	26,619.90	41,999.10	(39,684.30)	-48.58%	15,379.20	57.77%	10	8	8		
SR60	San Bernardino	175218.6	20,775.40	39,580.50	(135,638.10)	-77.41%	18,805.10	90.52%	7	9	9		
I215	San Bernardino	89563.6	29,811.70	26,441.40	(63,122.20)	-70.48%	(3,370.30)	-11.31%	9	7	10		
I10	Riverside	22324.4	4,388.50	6,799.90	(15,524.50)	-69.54%	2,411.40	54.95%	12	11	11		
SR71	Riverside	57161	391.70	1,400.50	(55,760.50)	-97.55%	1,008.80	257.54%	11	12	12		
TOTALS		3,458,000	1,036,597	1,623,459	-1,834,541	-53.1%	586,862	56.6%					

The Congestion by Route table shows that congestion has increased by 56.6% from the previous quarter, however this is still a 53.1% decrease from one year ago.