



NOTE:
 Type "B" seal shown. Type "A" seals to conform to the general path of seal shown, cuts for bending not required. Bend Type "A" seals 3" up into curb or barrier rail on only the low end of the seal.

CONCRETE BARRIER AND SIDEWALK

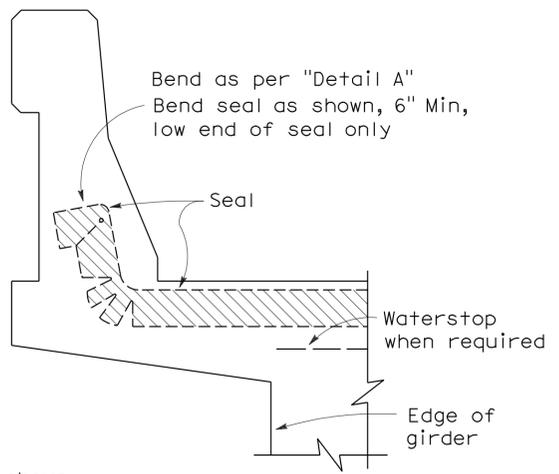


CONCRETE BARRIER

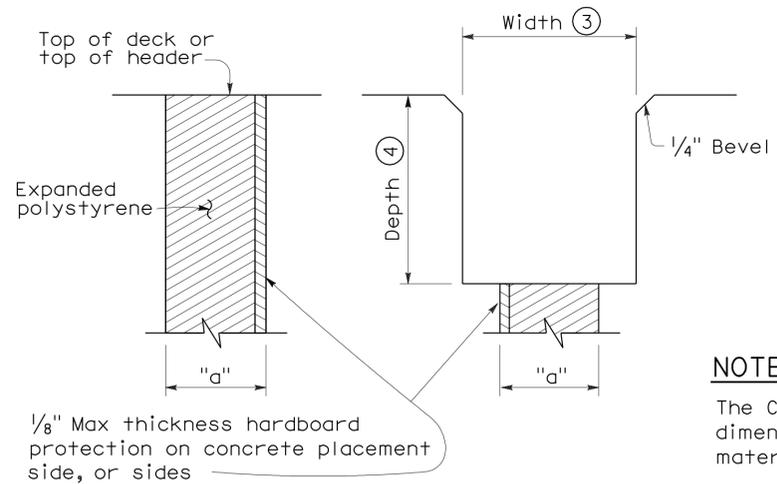

FORMING DETAIL SAWCUT DETAIL


NOTE:
 The Contractor shall verify all controlling field dimensions before ordering or fabricating any material.

JOINT SEALS DETAILS

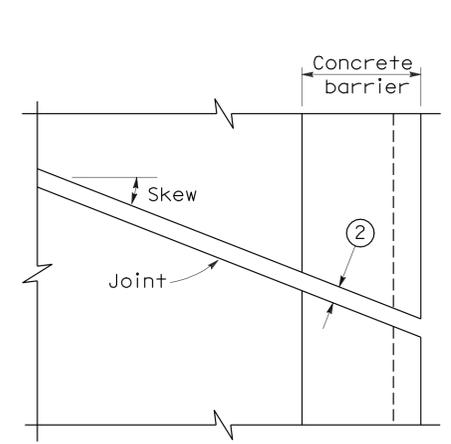


PLAN OF JOINT (SKEW ≤ 20°)

Min ϕ radius to be 4 times uncompressed width of seal or as recommended by the manufacturer, whichever is greater

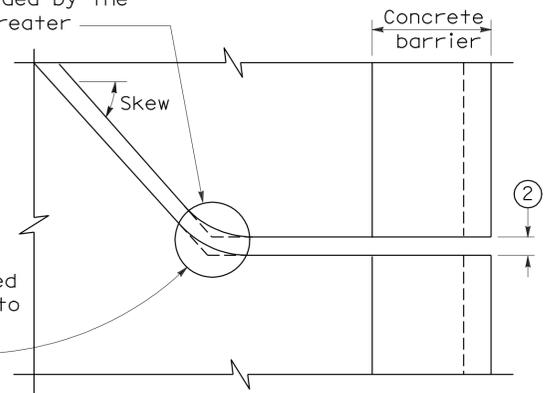

PLAN OF JOINT (SKEW > 20°)

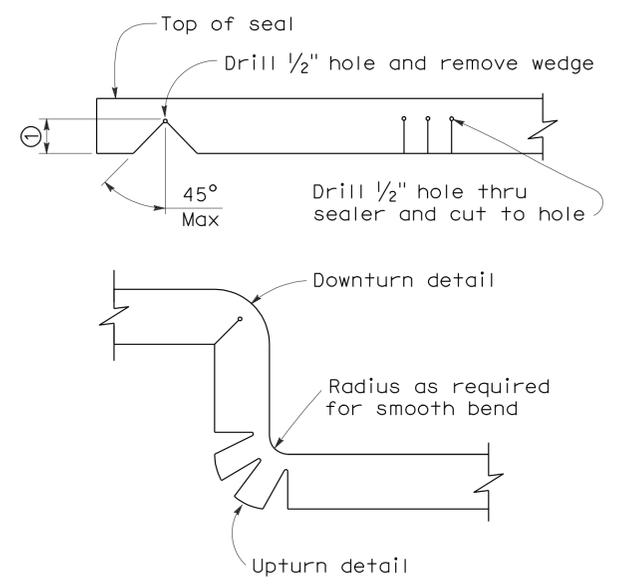

DETAIL A


NOTES:

- 1 Make smooth cuts from the bottom of seal to 1 1/2" clear of top leaving at least one complete cell between the top of the cut and top of the seal. When necessary cut back of seal to clear conduit and round openings.
- 2 Opening in barrier to match width of sawn deck joint.
- 3 Sawcut groove widths shall be as ordered by the Engineer.
- 4 Depth of sawcut: Type A - Depth to be 2" minimum.
 Type B - Depth to be equal to or greater than the depth of seal measured along the contact surface, when compressed to minimum width position (W₂) plus dimensions shown.
- 5 MR (movement rating) as shown on other plan sheets.
- 6 Other depths must be approved by the Engineer.

DIMENSIONS "a" OF JOINT REQUIRED

Movement Rating (MR) ⑤	Bridge Type	"a" Dimension		
		Deck Concrete Placed		
		Winter	Fall-Spring	Summer
2"	All except CIP/PS	1 1/2"	1 1/4"	3/4"
	CIP/PS	1 1/4"	1"	1/2"
1 1/2"	All except CIP/PS	1 1/4"	1"	1/2"
	CIP/PS	1"	3/4"	1/2"
1"	All except CIP/PS	1"	3/4"	1/2"
	CIP/PS	3/4"	1/2"	1/2"
1/2"	All except CIP/PS	3/4"	3/4"	1/2"
	CIP/PS	1/2"	1/2"	1/2"

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION
JOINT SEALS
(MAXIMUM MOVEMENT RATING = 2")
 NO SCALE

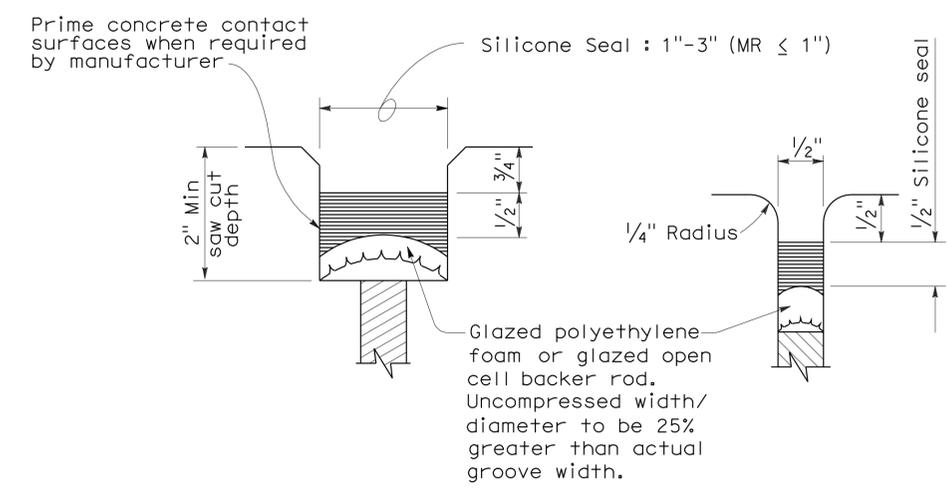


TYPE A SEAL

Movement rating : Silicone = 1" Max

TYPE AL SEAL

Longitudinal joints only

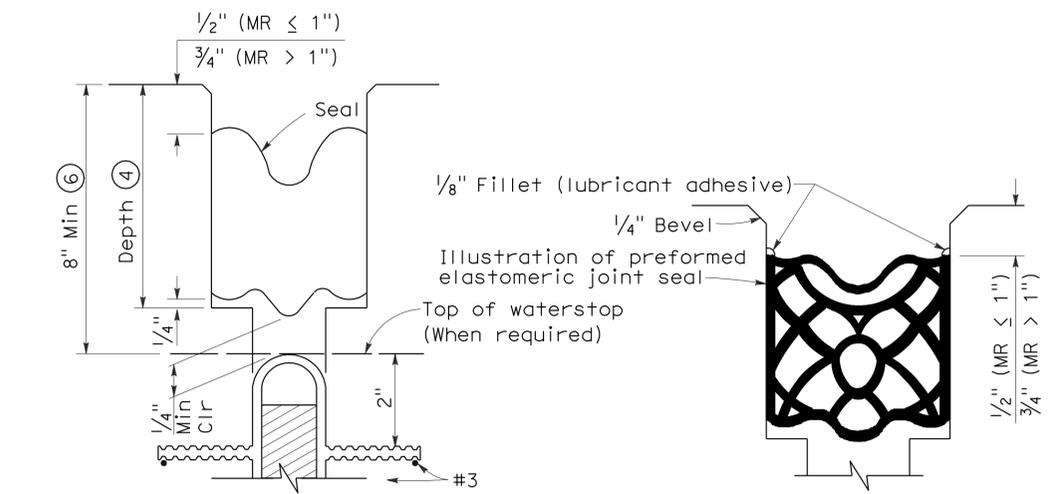

TYPE B JOINT SEAL IN MINIMUM WIDTH POSITION (W₂)

TYPE B SEAL

Movement Rating ≤ 2"

RSP B6-21 DATED OCTOBER 5, 2007 SUPERSEDES STANDARD PLAN B6-21 DATED MAY 1, 2006 - PAGE 258 OF THE STANDARD PLANS BOOK DATED MAY 2006.

REVISED STANDARD PLAN RSP B6-21

2006 REVISED STANDARD PLAN RSP B6-21