




**PLAN
NEW CONSTRUCTION**

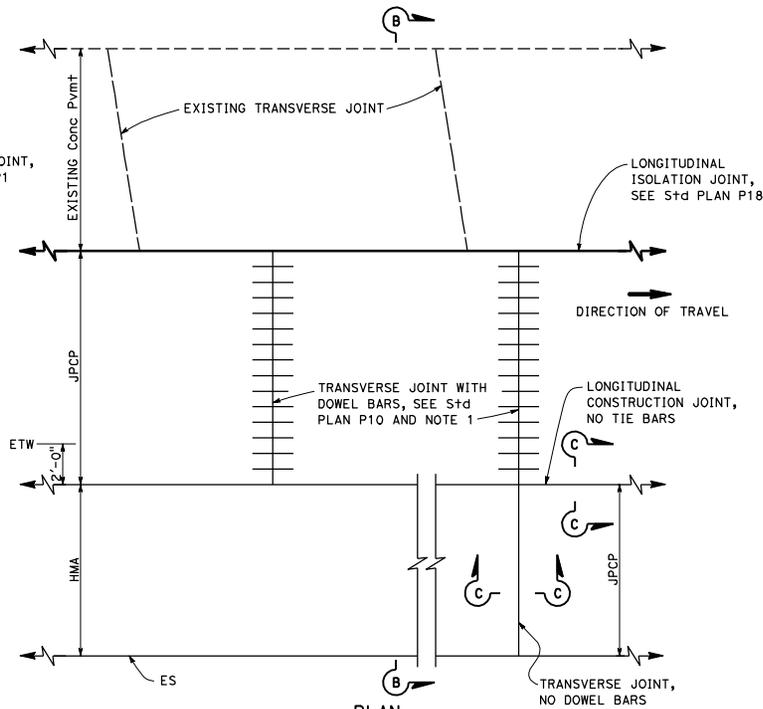

**PLAN
LANE/SHOULDER ADDITION OR RECONSTRUCTION**

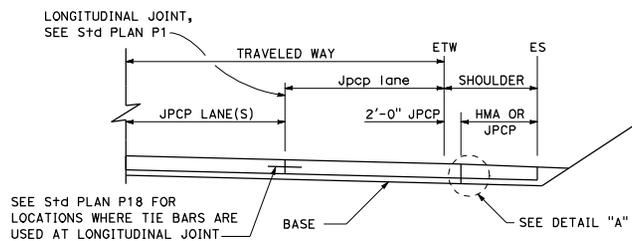

SECTION A-A

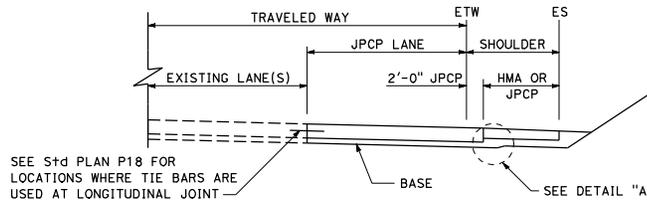

SECTION B-B



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

William K. Farnbach
 REGISTERED CIVIL ENGINEER
 No. C49042
 Exp. 9-30-12
 CIVIL
 STATE OF CALIFORNIA

May 20, 2011
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

NOTES:

1. Transverse joints shall be constructed at right angles to the longitudinal pavement joints in new Jointed Plain Concrete Pavement and spaced at successive repeated intervals of 12', 15', 13' and 14'.
2. For locations of rumble strips, see project plans. For rumble strip details not shown, see Standard Plans A40A and A40B.
3. Joint spacing patterns do not apply to intersections.



**SECTION C-C
TRANSVERSE/LONGITUDINAL JOINT**
(no dowel bars/tie bars)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**JOINTED PLAIN CONCRETE
PAVEMENT-WIDENED SLAB DETAILS**

NO SCALE