



Figure 7-18: Sand Barrel Arrays

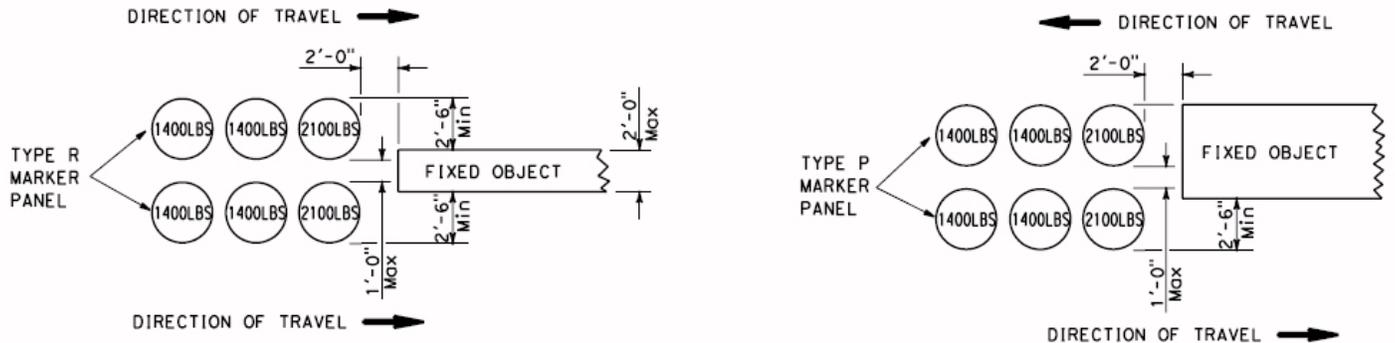

**TEMPORARY CRASH CUSHION
SAND BARREL ARRAY
25 MPH OR LESS**

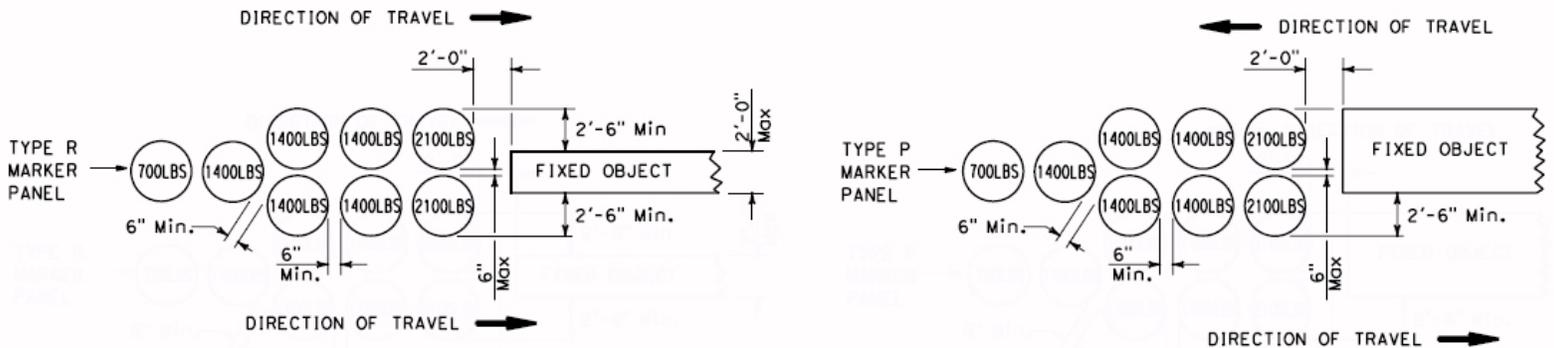

**TEMPORARY CRASH CUSHION
SAND BARREL ARRAY
35 MPH OR LESS**

Notes:

1. ## indicates sand filled module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the module.
2. All sand weights are nominal.
3. Temporary crash cushion arrays shall not encroach on the traveled way.
4. Place the Type P marker panel so that the bottom of the panel rests upon the ground.
5. Refer to Standard Plan A73B for marker details.
6. Approach speeds indicated conform to NCHRP 350 Report criteria.
7. Use of pallets is optional.